




Installation of ZEBRA & BLINDS with regular cassette

*Make sure your hands are clean before handling the cassette


You will need...

- A square screwdriver
- A measuring tape
- A pencil

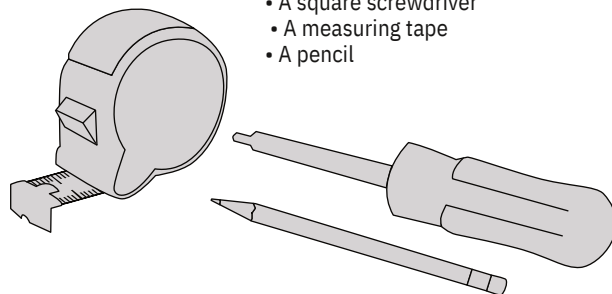


With your blind, you will receive the following hardware:

- 2 to 4 swivel brackets
- Same amount of screws

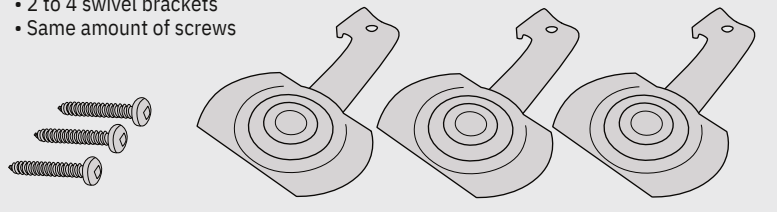


1 Assess the depth to clear obstacles (mark it with your pencil)




2 Install swivel brackets approximately 3 to 4" from the edge of the frame.


*Each bracket must be opened towards the front.




3 Install the blind.

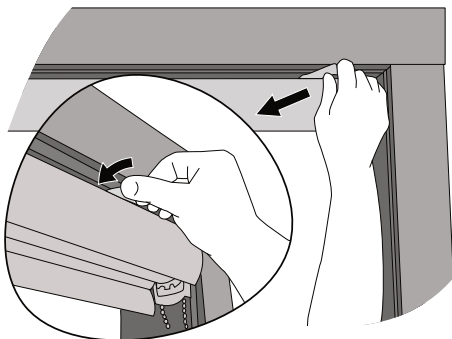

4 Then lower the blind to the desired height and install the chain safety tensioner, applying slight tension to the chain.

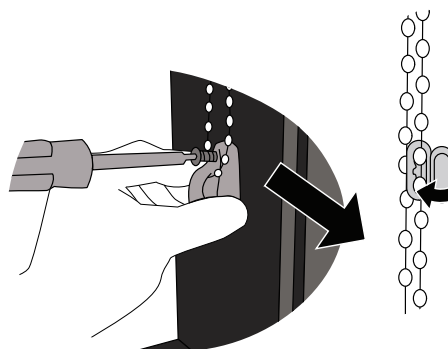

5 Adjust the desired position with the chain.



GREAT WORK!




Installation de ZEBRA & TOILE avec cassette régulière

*Assurez-vous que vos mains soient propres avant de manipuler la cassette de la toile.


Vous aurez besoin...

- D'un tournevis carré
- D'un ruban à mesurer
- D'un crayon à mine

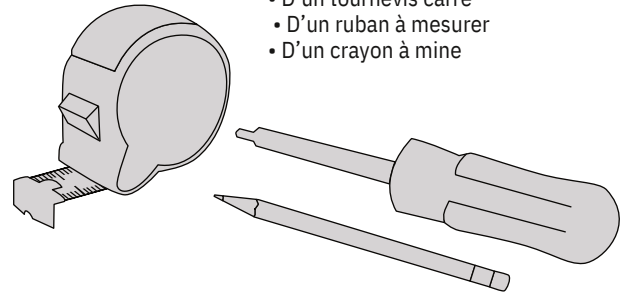


Avec votre store, vous recevrez la quincaillerie suivante:

- 2 à 4 supports pivotants
- Nombre équivalent de vis

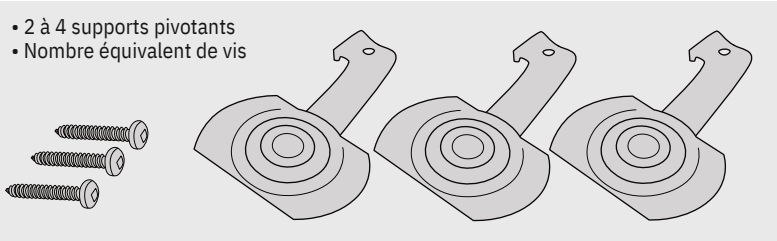


1 Évaluez la profondeur pour dégager les obstacles (faire une marque avec votre crayon)




2 Vissez les supports pivotants à environ 3 à 4" du bord du cadre.


Chaque support doit être ouvert vers l'avant.




3 Fixez la toile (ne pas dérouler le store)

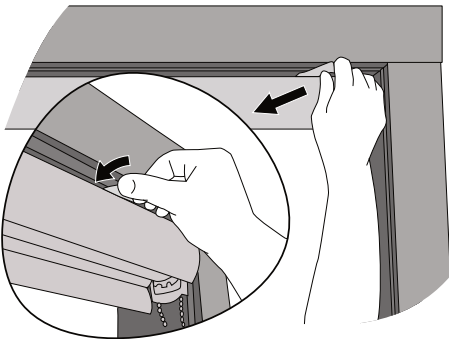

4 Abaissez le store à la hauteur souhaitée et installez le tendeur de sécurité de la chaîne, en appliquant une légère tension à la chaîne.

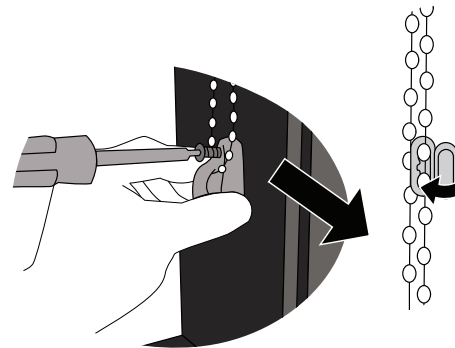

5 Déroulez la toile à la hauteur désirée.



BON TRAVAIL !